





### Feature

- Robust Design and Easy Installation
- Strong Against Shock or Side Force
- Protection Class IP68
- Suitable for Moisture Environment
- Paint Finished Steel
- Braided Shield 4-Wire Round Cable



Rated Capacity (R.C)	tf	20, 25, 30tf
Rated Output (R.O)	mV/V	2.0±0.006
Zero Balance	mV/V	0.0±0.03
Accuracy Class		
Combined Error	%	0.02
Repeatability	%	0.01
Creep (30min.)	%	0.017
Temperature Effect On		
Zero Value	% / 10°C	0.03
Output Value	% / 10°C	0.03
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	800±40
Output	Ω	700±7
Insulation	MΩ	>2,000
Compensated Temp Range	°C	-10 ~ +40
Operating Temp Range	°C	-20 ~ +80

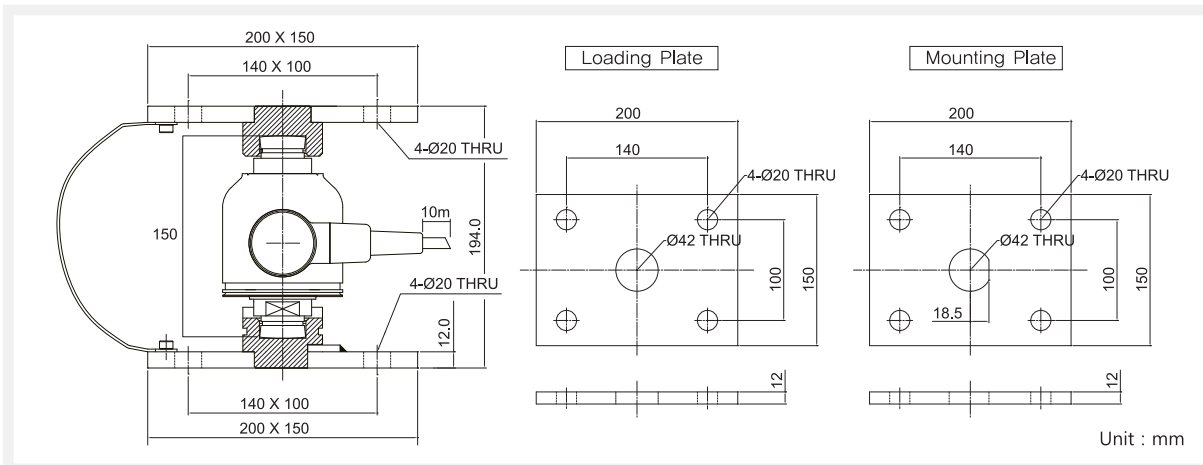

CABLE	COLOR CODE
EXC +	(RED)
EXC -	(WHITE)
SIG +	(GREEN)
SIG -	(BLUE, BLACK)
SHLD	(YELLOW)