



Calibration  
certificate

**Thermometers**  
*special food industry*  
**TK150 / TN150 - TN 151 / TR 150**

**New**  
**CE**



**Functions**

- Selection of units
- HOLD function
- Simplified mode function
- Minimum and maximum value
- Adjustable automatic shut-off
- Adjustable back-light
- Delta T
- Adjustable alarms
- Auto-Hold function

**Technical features**

- Display**.....2 lines, LCD technology. Size 50 x 34,9 mm.  
1 line of 5 digits of 7 segments (value)  
1 line of 5 digits of 16 segments (unit)
- Housing**.....Shock-proof made of ABS, IP67 protection  
with CEP 150 food industry protective cover
- Keypad**.....Metal coated with 5 keys
- Cable**.....Straight, lg. 200 mm (TN150-TN151 / TR150)  
Coiled, lg 220 mm (TK150)
- Connectics**.....Mini-DIN connectors (TN150-TN151)  
compensated miniature female connectors (TK150)
- Conformity**.....Electromagnetical compatibility  
(NF EN 61326-1 guideline)
- Power supply**.....1 alkaline battery 9V 6LR61
- Environment**.....Neutral gas
- Operating temperature**.....from 0 to 50°C
- Storage temperature**.....from -20 to +80°C
- Auto-extinction**.....adjustable from 0 to 120 min
- Weight**.....190g
- Languages**.....French, English


**Measuring element**

- TK 150.....Thermocouple K, J or T class 1
- TN 150 – TN 151.....CTN : resistance à 25°C,  $R_{25} = 10K\Omega$  Nominal  
Beta value B25/85 = 3,695K ±1%
- TR 150.....Pt 1000 class A




**"Supplied with CEP 150 protective cover"**


**TK 150 - 1 channel**



**TN 150 - 1 channel**



**TR 150 - 1 channel**



**TN 151 - Fixed probe**



\*except class 150S

## Spécifications

### TK 150

	Measuring units	Measuring ranges	Accuracy*	Resolutions
<b>THERMOCOUPLE PROBES</b> (see related data sheet)				
Thermocouple K	°C, °F	from -200 to 1300°C	±1,1°C or ±0,4% of reading**	0,1 °C
Thermocouple J	°C, °F	from -100 to 750°C	±0,8°C or ±0,4% of reading**	0,1 °C
Thermocouple T	°C, °F	from -200 to 400°C	±0,5°C or ±0,4% of reading**	0,1 °C

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.  
\*\*the accuracy is expressed either by a deviation in °C, or by a percentage of the value concerned. Only the bigger value is considered.

### TN 150-TN151

	Measuring units	Measuring ranges	Accuracy*	Resolutions
<b>TEMPERATURE</b>				
TN 151 Fixed probe	°C, °F	from -40 to 120°C	±0,3°C (-40°C<T<+70°C) ±0,5°C beyond	0,1 °C
TN 150 1 channel	°C, °F	from -40 to 120°C	±0,3°C (-40°C<T<+70°C) ±0,5°C beyond	0,1 °C

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.

### TR 150


	Measuring units	Measuring ranges	Accuracy*	Resolutions
<b>TEMPERATURE</b>				
TR 150 Pt 1000 1 channel	°C, °F	from -100 to 400°C	±0,4% ±0,3°C	0,1 °C

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.

## Dimensions


### TK 150

- Top view




### TK 150 / TN 150-TN 151 / TR 150

- Front view
- Side view

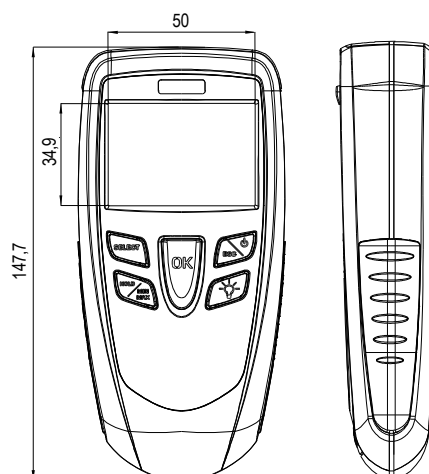

### TN 150-TN 151 / TR 150

- Top view




## Working principle

### TK 150

According to the Seebeck effect, when two wires composed of different metals are joined at both ends, an electric circuit is formed. The voltage increases with temperature.

I.E : Thermocouple K

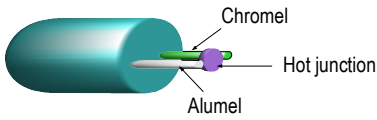

### TN 150 – TN 151

**Thermometer : NTC probe**

Negative temperature coefficient probe are thermistance with a resistance that decreases with temperature according to the equation below :


$$R_{(T)} = R_{(T_0)} e^{\left( \frac{\alpha}{100} \times (T_0 + 273.15)^2 \times \left( \frac{1}{T + 273.5} - \frac{1}{T_0 + 273.5} \right) \right)}$$

RT= resistance sensor value at temperature T  
 R(T<sub>0</sub>)= resistance sensor value at reference temperature T<sub>0</sub>. T and T<sub>0</sub> in °C  
 α et T<sub>0</sub> are sensor specific constants

### TR 150

**Thermometer : Pt1000 probe**

Pt100 is a resistance with a positive temperature coefficient which varies according to the temperature. The higher the temperature is, the more the value of the resistance increases.  
 ie : For 0°C ≈ 1000 Ω  
 For 100°C ≈ 1385 Ω.



## Supplied with ...

● Supplied with ○ Optional

DESCRIPTION	TK 150	TN 150	TN 151	TR 150
Thermocouple probe	○			
NTC temperature probe		○		
Food industry penetration probe			●	
Choice of Pt 1000 temperature probe				○
Food industry protective cover IP67	●	●	●	●
Calibration certificate*	●	●	●	●
Transport case	●	●	●	●


\*except class 150S



**Large choice of temperature probes (See related data sheet) :**

- ambient
- contact
- penetration
- food industry penetration
- general use
- Etc...

## Accessories (See related data sheet)

<b>CE 100</b> Protective cover with magnet and holding system 	<b>RTS</b> Telescopic extension (for probe), 1m long and bent at 90°. 
<b>BN (See related data sheet)</b> Black ball Ø 150mm with junction for temperature probe Ø 4,5mm. Other on request. 	<b>GST</b> Silicone heat-conductive grease for temperature probes 



## Warranty period

Instruments have 1-year guarantee for any manufacturing defect (return to our After-Sales Service required for appraisal).

[www.kimo.fr](http://www.kimo.fr)

**EXPORT DEPARTMENT**

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : [export@kimo.fr](mailto:export@kimo.fr)



Distributed by :