

Item No : 57

High Resolution



Model 337

Features

- Jaw opens to 0.5"
- 1mA high resolution
- Digital clamp tester for AC/DC current measurement
- Providing wide measuring range from very small to large current
- Designed to safety standard IEC 61010-2-032: CAT III 600V and pollution degree 2.
- Data hold and Max hold function
- Dynamic range of 4000 counts full scale
- Auto power off

Specifications


Function	Range	Max. Resolution	Basic Accuracy
Current AC	4A, 80A	1mA	$\pm(2.5\%+5d)$
Current DC	4A, 80A	1mA	$\pm(2.5\%+4d)$
Voltage AC	400mV~600V	0.1mV	$\pm(2.0\%+4d)$
Voltage DC	400mV~600V	0.1mV	$\pm(1.5\%+3d)$
Resistance	400Ω~40MΩ	0.1Ω	$\pm(1.5\%+2d)$
Frequency	5Hz~10MHz	0.001Hz	$\pm(1.2\%+3d)$
% Duty	5%~99.9%	0.1%	$\pm(1.2\%+3d)$
Diode Check	Test current of 0.3mA, Open circuit voltage 1.5V		
Continuity Check	Threshold 50Ω, continuity beeper 2.7kHz		

Size(HxWxD): 210mm x 70mm x 37mm

Weight: 200g



EMC & LVD
EN: 61326
EN: 61010-1,
EN: 61010-02-031

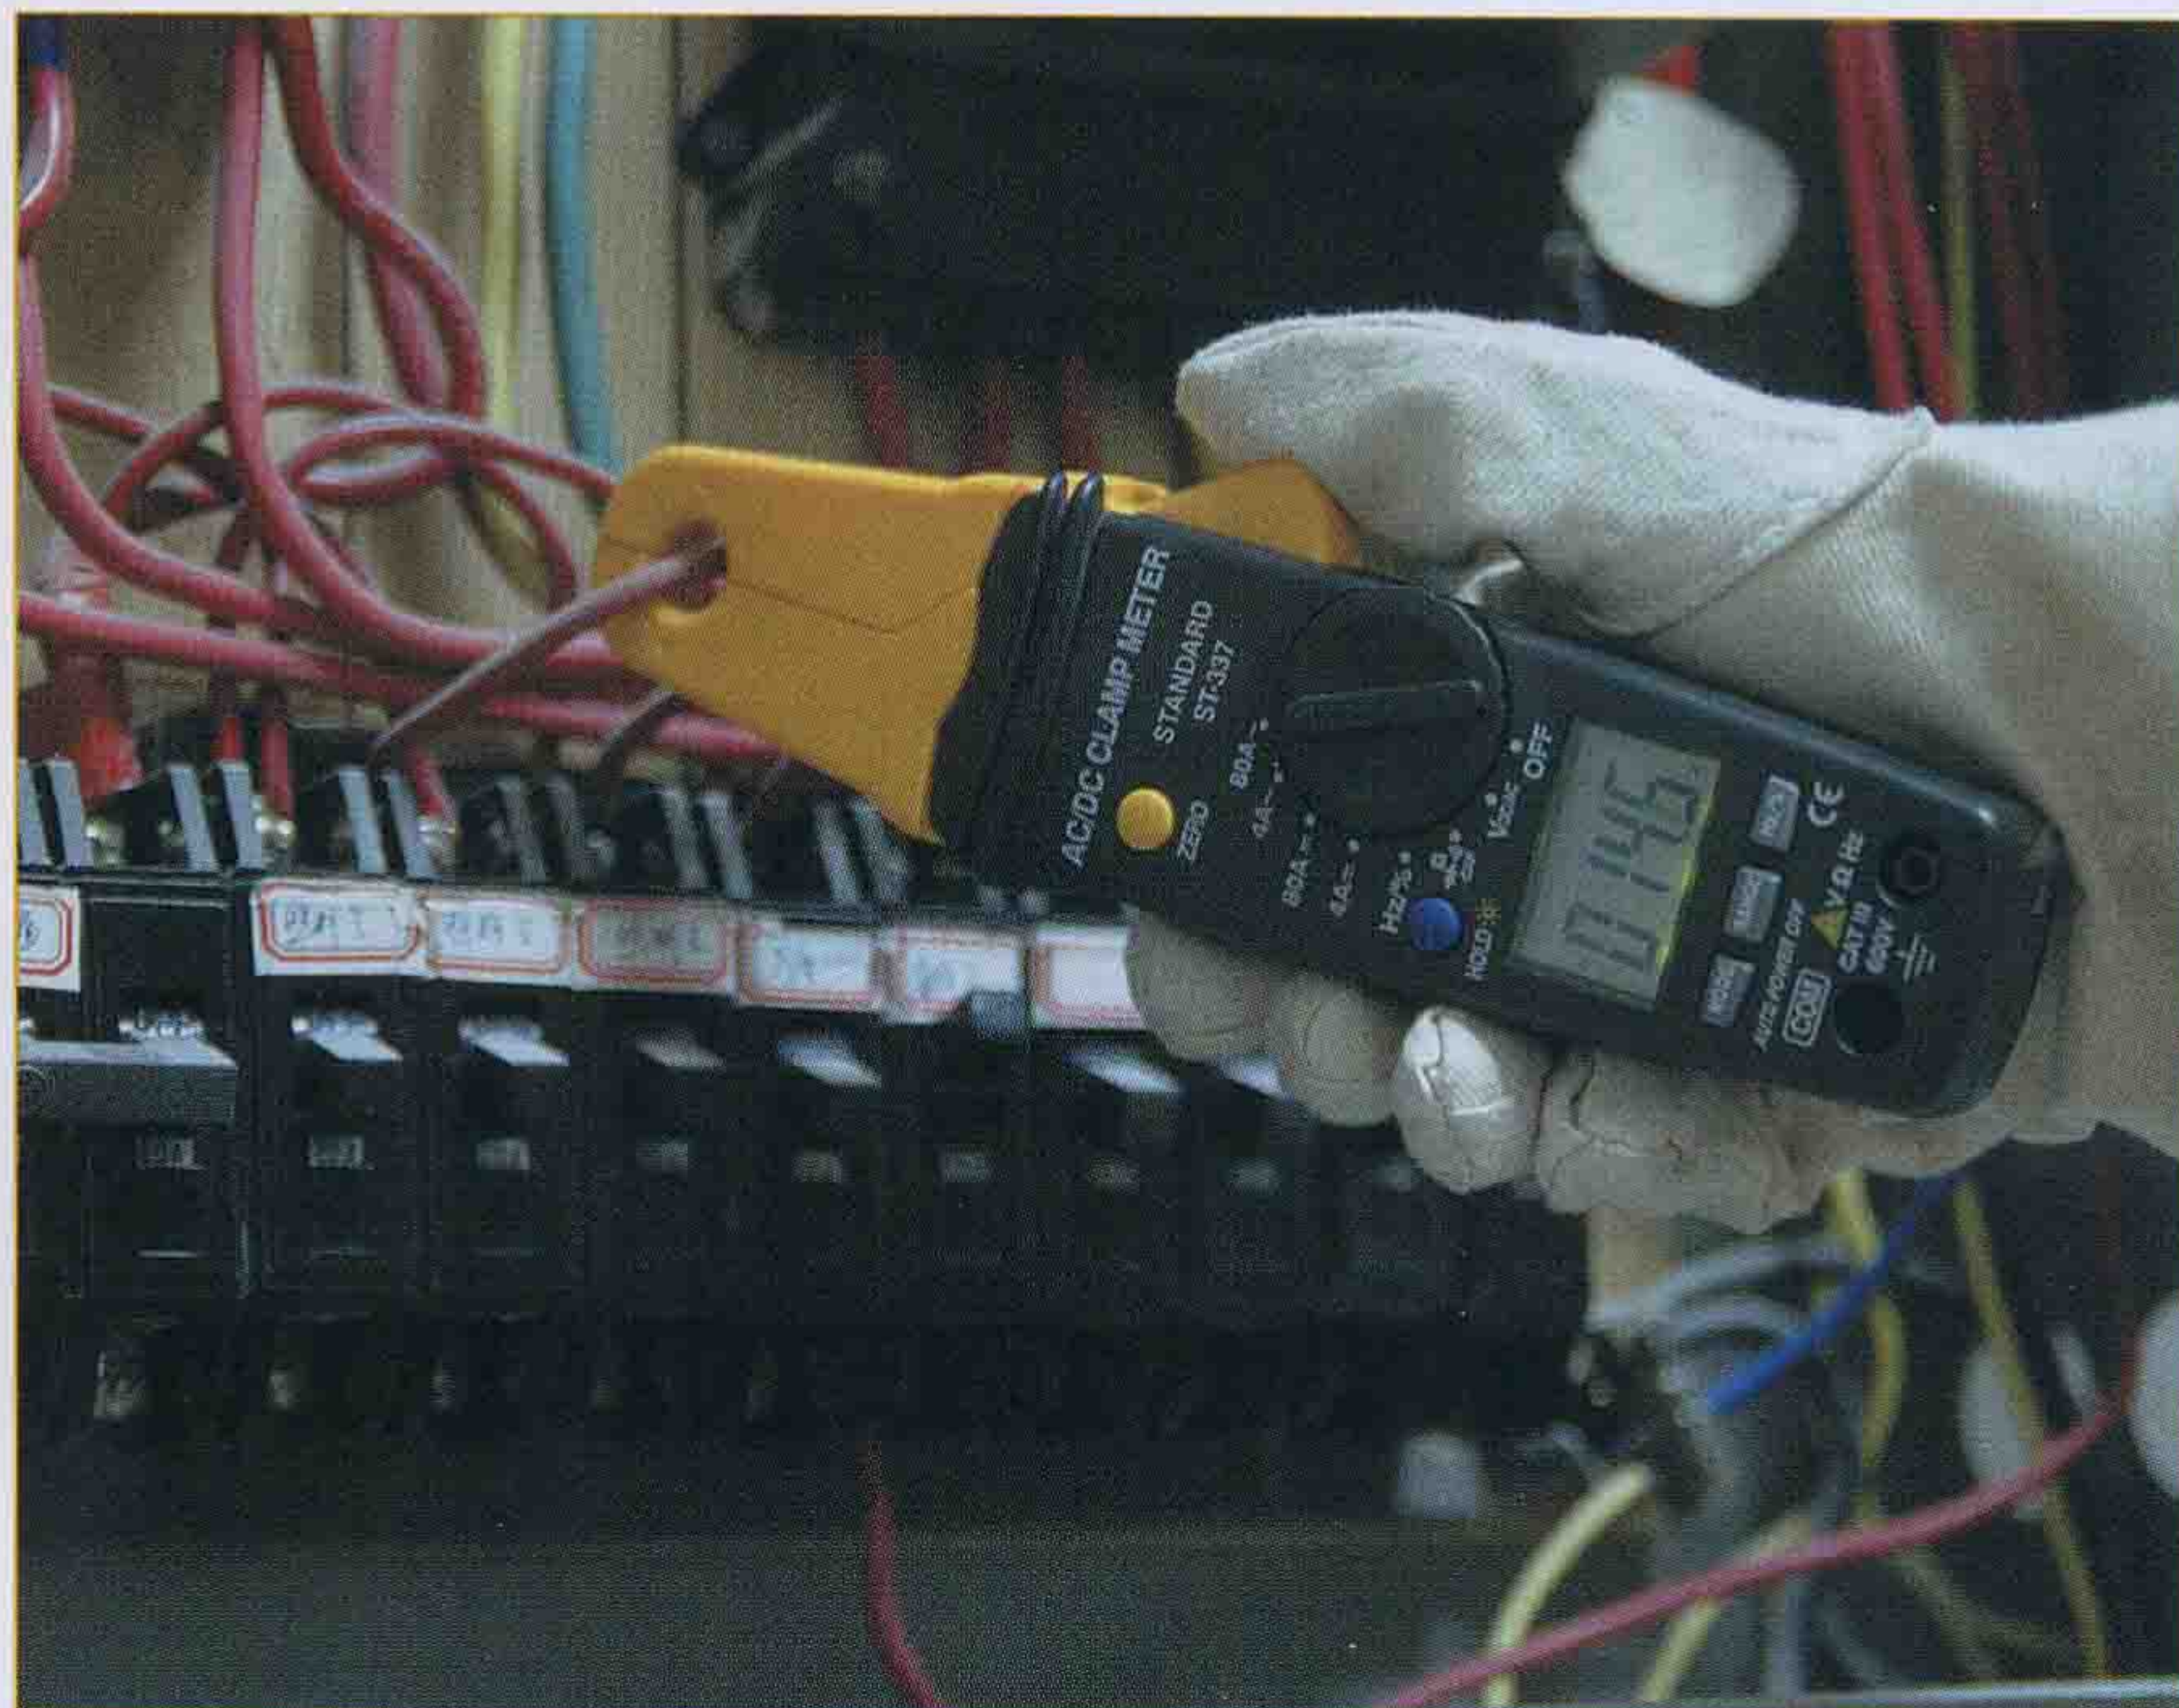

Accessories:

Test leads, Gift box with carrying case, 9V battery.